

**Office of the Principal  
Plassey College  
Mirabazar, P.O.- Plassey, Block- Kaliganj, Nadia.**


**NOTICE INVITING TENDER NO. 02 OF 2020-21 Dated 18.01.2021**

Sealed Offline Tenders are hereby invited by the undersigned for the following work from eligible agencies as per particulars given below and the same will be submitted to the "tender box", Plassey College office, P.O.-Plassey, Dist-Nadia up to the date and time specified hereunder and will be opened on the same day at 3:00 p.m. by the Principal, Plassey College, P.O.-Plassey, Dist-Nadia.

- |  |   |   |
|--|---|---|
| 1) Name of work                                    | : | Construction of boundary wall to the south side of Plassey College, Mira Bazar, P.O.-Plassey, Dist- Nadia |
| 2) Name of the Concerned Office                    | : | Plassey College, P.O.-Plassey, Dist – Nadia, Pin- 741156  |
| 3) Estimated amount                                | : | Rs. – 370663.00   |
| 4) Time of Completion of work                      | : | 60 days from the date of acceptance of Work Order   |
| 5) Tender documents will be available              | : | www.plasseycollege.ac.in  |
| 6) Contractors eligible to submit tenders          | : | Bona-fide contractors having GSTIN, PAN and I. Tax return certificate (F.Y. 2019-20)                      |
| 7) Place for submitting Tender document            | : | Tender box lying in the Plassey College office  |
| 8) Last date & time limit for submission of Tender | : | 29-01-2021 (Friday) up to 2:00 p.m.   |
| 9) Date & time for opened of tender                | : | 29-01-2021 (Friday) up to 3:00 p.m.   |
| 10) Earnest money                                  | : | Rs. 7413.00   |
| 11) Validity of the Tender                         | : | The offer will remain valid for acceptance for 120 days from the date of receipt of tender                |
- 12) Conditional tender will be liable for rejection.
- 13) Cost over-run and consequent cost escalation for any material, labour, etc. will not be allowed.
- 14) No mobilization advance/ secured advance will be allowed.
- 15) in case of inadvertent typographical mistake found in the specific price schedule of rates, the same will be treated to be so corrected as to confirm with the prevailing relevant schedule of rates and/ or technically sanctioned estimate.
- 16) Interested agencies are required to quote the rate in his/her own hand writing in figure as well as in words mentioning percentage above/ below or AT PAR on the basis of relevant price schedule of probable items with approximate quantities.
- 17) Contractors shall have to comply with the provisions of (a) the contract Labour (Regulation Abolition) Act, 1970 (b) Apprentice Act 1961 and (c) Minimum Wages Act, 1948 or the modification there or any other laws relating thereto and the rules and order issued there under from time to time.
- 18) The payment will be made in two installments. First R.A. bill (75 % of the bill amount) may be paid after completion of pillar and tie beam work and second & final payment may be paid after the completion of entire project including brick work and plastering work and to the satisfaction of the college construction committee. Contractors are requested to quote their rates accordingly. All the payment shall be made vide account payees cheques.
- 19) The interested agencies will have to provide self-attested photocopies of PAN Card, latest Income Tax return, latest Professional Tax Clearance Certificate, GSTIN Certificate which will be valid up to the date of opening of the tender papers and other Credential Documents (within last 5(five) years from the last date of submission of tender documents) along with the Tender Paper.
- 20) Registered Labour Co-Operative Societies Ltd. will have to provide self-attested photocopies of current Audit Report, No Objection Certificate in support of their registration, Bye-laws PAN Card, latest Income Tax Clearance Certificate, GSTIN Certificate, other Credential document (not less than 50% of the estimated amount in a single job and other documents for having experience of executing similar nature of work within last 5(five) years from the Last date of submission of tender papers) along with Tender paper which will be valid up to the date of opening of the tender. Original documents may also be verified (If necessary) before submission of tender papers as per requirement.


Contd....P/2

- 21) Representation in Tender in connection with tender submitted by Co-Operative Societies:- The Chairman and the Secretary or three directors including either the Chairman or the Secretary shall execute and sign all deeds, documents, tender papers as per act of the Bye-Laws of the Co-Operative Societies, failing which the tender will be liable for rejection. The copy last Audit Report (full) including copy of the minutes of last A.G.M has to be submitted along with application for verification of the authority.
- 22) In case of partnership firm, the interested agencies shall produce authentic document in respect of firm registration obtained from the Registrar of firms, West Bengal pursuant to the Indian Partnership Act – 1932 (Act IX of 1932) along with application (Deed made by Notary will be allowed).
- 23) No credential will be considered unless it is supported by payment certificate, work order and completion certificate mentioning the date of completion issued by the competent authority.
- 24) All interested agencies or their authorized representatives are requested to present personally during the opening of the tender papers as witness.
- 25) No person will be allowed to quote rate on the basis of Legal Power of Attorney conferred to him by the Firm/ Agency except in circumstances where necessary Govt. approval has been obtained.
- 26) The college authority shall be at liberty to take such legal action or actions as they deem fit and proper, in the event the agencies' submitted documents and credentials are found false and fake.
- 27) Incurred income tax, GST and labour CESS shall be deposited by the agency itself under their respective registration numbers and its related certificate/challans (photocopy) shall be submitted to the undersigned as per Govt. norms.
- 28) Prescribed proforma of Tender paper & plan and estimate will be available on [www.plasseycollege.ac.in](http://www.plasseycollege.ac.in)
- 29) The tender for the works shall remain open for acceptance for a period of 120 days from the date of N.I.T. If any agency withdraws his/her tender before the cited period or before the date of issue of work order/ letter of acceptance, whichever is earlier, or make any modification in the terms and condition of the tender which are not acceptable to the college authority, then the college authority shall, without prejudice to any other right or remedy, be at liberty to forfeit the entire earnest money. Further, the agency shall not be allowed to submit any tender in this Department for a minimum period of one year.
- 30) Earnest money will be deposited in the shape of Bank draft in favour of Principal, Plassey College, P.O.-Plassey, Dist-Nadia.
- 31) No material will be supplied to the agency by the college.
- 32) Security Money (8%) and Earnest Money (2%) will be refunded after 6 months from the date of completion of the work. No earlier claim will be entertained.

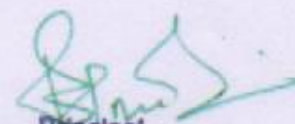  
 Principal  
 Plassey College  
 Mirabazar, P.O.-Plassey, Dt-Nadia

Copy forwarded to:

- 1) Sabhadhipati, Nadia Zilla Parishad, Krishnanagar
- 2) Sabhapati, Kaliganj Panchayet Samity, Debagram
- 3) Pradhan, Mira i No. G. P., Mira Bazar, Plassey

  
 Principal  
 Plassey College  
 Mirabazar, P.O.-Plassey, Dt-Nadia



### Tender Paper

NIT No. – 02 of 2020-21, Dated-18/01/2021 of Principal, Plassey College,  
Mira Bazar, P.O.-Plassey, Block-Kaliganj, Dist-Nadia.

- |   |  |
|---|--|
| 1) Name of the work                     | : - Construction of boundary wall to the south side of Plassey College |
| 2) Estimated Amount                     | : - Rs. 370663.00  |
| 3) Earnest Money                        | : - Rs. 7413.00  |
| 3) Time of completion of the work       | : - 60 days from the date of acceptance of Work Order                  |
| 4)                                      |  |
| a) Eligible Contractor's/ Agency's Name | : -  |
| b) Address                              | : -  |
|   |  |
| c) PAN No.                              | : -  |
|   |  |
| Bank Draft amount in Rs.                | : -  |
| Name of the Bank                        | : -  |
| Draft No.                               | : -  |
| Date                                    | : -  |
|   |  |
| 5) Contractor's/ Agency's rate:-        | (a) in figure : -  |
|   | (b) in word : -  |

I do hereby declare that I have read all terms and conditions mentioned in the N.I.T No. – 02 of 2020-2021 and schedule. All the documents and information placed by me are true to the best of my knowledge and belief. If there is any discrepancy in the documents and information placed by me, my tender may be cancelled. I also agree that I shall do the work as per rate mentioned above.

Date:-

Signature of the Tenderer/ Agency

**PROBABLE COST OF ESTIMATE WITH APPROXIMATE QUNTITIES FOR THE  
SCHEME,"CONSTRUCTION OF REMAINING BOUNDARY WALL AT  
PALLASY COLLEGE,MIRA BAZAR, P.O.- PLASSEY, DIST: NADIA, WEST BENGAL, 741156  
IN THE DISTRICT OF NADIA.**

Length of Proposed Boundary wall = 69.00 m					
Width of Footing = 0.75 m					
Depth of Footing = 0.750 m					
Height of Boundary wall from PL = 1.800 m					
Sl.	Description of Work	Quantity	Rate	Unit	Amount
1	<p><u>Page- 1, Item-2.a</u> : Earthwork in excavation of foundation trenches in all sorts of soil (including mixed soil but excluding laterite or sand stone) including removing, spreading or stacking the spoils within a lead of 75m as directed. This item includes necessary trimming the sides of trenches, leveling, dressing and ramming the bottom, bailing out water as required complete.</p> <p>i) Depth of excavation not exceeding 1.50m</p> $1 \times 31 \times 0.75 \times 0.75 \times 0.750 = 13.08 \text{ m}^3$	13.08 m <sup>3</sup>	Rs.11,927.00	m <sup>3</sup>	Rs.1,560.00
2	<p><u>Page- 45, Item- 13</u> : Supplying and laying Polythene Sheet (150gm/sq.m.) over damp proof course or below flooring or roof terracing or in foundation trenches.</p> $1 \times 31 \times 0.75 \times 0.75 = 17.44 \text{ m}^2$	17.44 m <sup>2</sup>	Rs.24.00	m <sup>2</sup>	Rs.419.00
3	<p><u>Page-24, Item- 10.A.a.i</u>: Cement concrete with graded stone ballast (40 mm. size excluding shuttering. [Pakur Variety]</p> <p>1:3:6 proportion.</p> $1 \times 31 \times 0.75 \times 0.75 \times 0.125 = 2.18 \text{ m}^3$	2.18 m <sup>3</sup>	Rs.4,938.00	m <sup>3</sup>	Rs.10,765.00
5	<p><u>Page-1, Item-3.a</u> : Earthwork in filling in foundation trenches or plinth with good earth in layers not exceeding 15 cm. including watering and ramming etc layer by layer complete</p> <p>a) In Foundation with earth obtained from excavation of foundation.</p> <p>1/5 th of excavation vide item. 1</p> $1 \times 1 \times \frac{1}{5} \times 13.08 = 2.62 \text{ m}^3$	2.62 m <sup>3</sup>	Rs.7,754.00	m <sup>3</sup>	Rs.203.00
7	<p><u>Page- 31, Item- 29</u> : 125 mm thick Brick-work with 1st class Bricks in cement mortar (4:1) in</p> <p>A. in Ground Floor</p> <p>A. In superstructure above Plinth</p> $1 \times 1 \times 61.25 \times 1.80 = 110.25 \text{ m}^2$	110.25 m <sup>2</sup>	Rs.664.29	m <sup>2</sup>	Rs.73,238.00
	<p><u>Page-39 : Item-7a</u> Nominal Mix M-20 cement concrete with graded stone chips (20 mm size) (Pakur/Chandil variety) excluding shuttering and reinforcement in Ground floor. A) Ground floor</p> $1 \times 31 \times 0.75 \times 0.75 \times 0.200 = 3.49 \text{ m}^3$ $1 \times 31 \times 0.25 \times 0.25 \times 0.600 = 1.16 \text{ m}^3$ $1 \times 69 \times 1.00 \times 0.25 \times 0.250 = 4.31 \text{ m}^3$ $1 \times 31 \times 0.25 \times 0.25 \times 1.500 = 2.91 \text{ m}^3$ $1 \times 69 \times 1.00 \times 0.25 \times 0.200 = 3.45 \text{ m}^3$	15.32 m <sup>3</sup>	Rs.6,500.00		Rs.99,572.00

Description of Work		Quantity	Rate	Unit	Amount
<p><b>Item No.-15.ii):</b> Reinforcement for reinforced concrete work in all sorts of works including distribution bars, stirrups, binders etc including supply of rods, straightening and removal of loose rust (if necessary), cutting to requisite length, marking and bending to correct shape, placing in proper position and binding with 16 gauge black annealed wire at every inter-section, complete as per drawing and direction.</p> <p>(a) For works in foundation, basement and upto roof of ground floor / upto 4m.</p> <p>(i) For steel/Mild steel In Ground Floor :</p> <p>0.90% of Concrete volume            = 1.10% x 15.32 M<sup>3</sup>            @ 7.856 MT per M<sup>3</sup> of concrete = 1.324 MT</p>		1.324 MT	Rs.54,400.74	MT	Rs. 72,015.00
8	<p><b>Page-151, item- 2 :</b> Plaster (to wall, floor, ceiling) with sand and cement mortar including rounding off or chamfering corners as directed and racking out joints or roughening of concrete surface, including throating, nosing and drip course where necessary.</p> <p>A. In Ground Floor.</p> <p>c)15 mm thick plaster in cement-sand mortar (1:6)</p> <p>In Walls etc.            1 X 2 X 69.00 X 1.800 = 248.40 m<sup>2</sup></p> <p>In top of tie band            1 X 1 X 69.00 X 0.250 = 17.25 m<sup>2</sup></p> <p>In bottom of tie band            1 X 1 X 61.25 X 0.125 = 7.66 m<sup>2</sup></p> <p>Pillar Sides            2 X 31 X 0.125 X 1.800 = 13.95 m<sup>2</sup></p> <p>287.26 m<sup>2</sup></p>	287.26 m <sup>2</sup>	Rs.189.11	m <sup>2</sup>	Rs.54,324.00
9	<p><b>Page-158; Item-16.(iii) :</b> Applying decorative cement based paint of approved quality after preparing the surface including scraping the same thoroughly (plastered or concrete surface) as per manufacturer's specification. Two coats</p> <p>b) Area same as it-11.b = 287.26 m<sup>2</sup></p>	287.26 m <sup>2</sup>	Rs.49.00	m <sup>2</sup>	Rs.14,076.00
13	<p>Supplying fitting fixing sign board of size 500 X 400 of 20 mm thick marble plate fitted on brick wall with cement-sand mortar (1 : 3) , making band all round the display board all complete including lettering as per direction. ( N. S. ).</p>	1.00 No	Rs.1,500.00	LS	Rs. 1,500.00
					= Rs.3,27,672.00
<b>TOTAL COST</b>					= Rs.3,27,672.00
Add GST					12.00% = Rs.39,320.64
Sub Total :					= Rs.3,66,992.64
Add Cess					1.00% = Rs.3,669.93
					Rs.3,70,663.00

checked  
 h  
 m  
 25/8/2020


Rate vetted Amount of =  
 3,70,663.00 only

*[Signature]*  
 25/8/2020

*[Signature]*  
 25/8/2020

*[Signature]*  
 Prasanta Ghosh, L.C.E.  
 Anadinagar, Krishnagar  
 L.B.S. of Kgr. Municipality  
 Regn. No.-16/2001-2002 K.M.

PROPOSED DRAWING OF BOUNDARY WALL OF PALLASAY COLLEGE

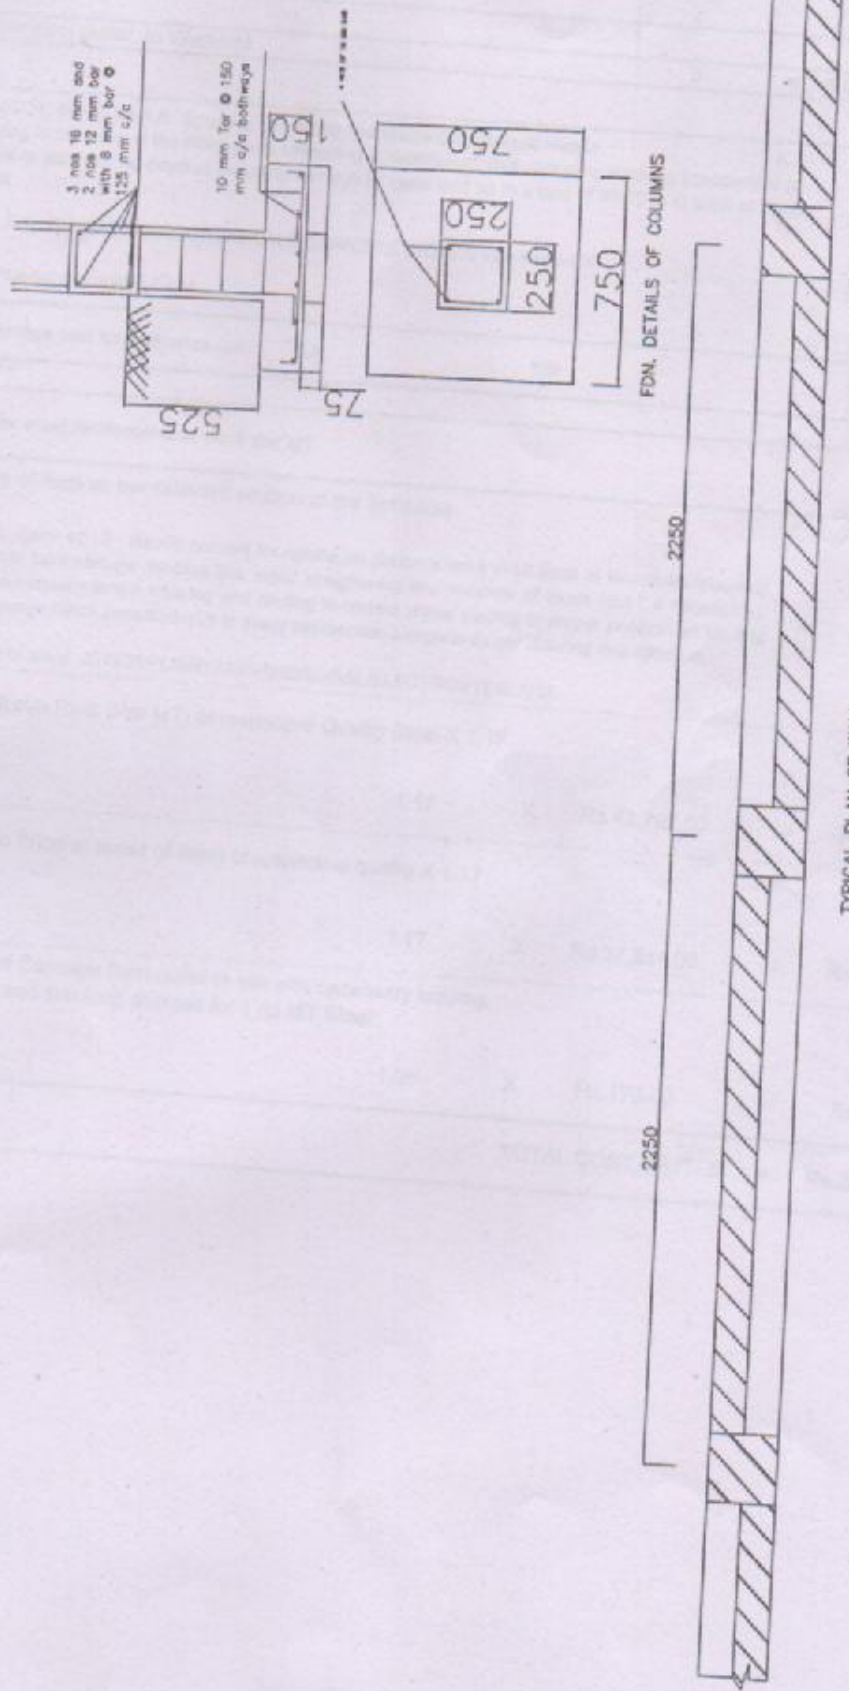

*[Handwritten Signature]*

Principal  
Pallasay College  
Miranazar, P.O.-Pallasay  
Dist.-Nadia

## ANNEXURE - I

(Vide Page-310 PWD(WB)'s Modified Schedule of Rates, w.e.f 01.11.2017 read with 5rd corri.

### FORMAT - B

Format for analysis of rate of items involving use of Steel supplied by contractor.

Distance from local outlet to Worksite		5	=	5.0	Km.
1	Page-224, Item-1.03.A.h: Loading, unloading and stacking by Manual Means Loading in to trucks at the lifting point, unloading at destination, (but excluding stacking) properly in go downs or yard etc. as directed including carriage by head load up to a lead of 50.00 m at each of the two points.	A.			Carriage cost / MT
	TABLE 1 : ROAD TRANSPORTATION & CARRIAGE WORKS vide Page-230				Rs.96.00
2/	Distance carried upto 5.0 KM.				Rs.82.00
	Carriage cost for a distance upto	5.0		KM	Rs.178.00

Cost of MS/ Tor steel reinforcement work per MT					
Step- 1	A) Rate of item as per relevant section of the Schedule  Page-43, Item- 40.i.ii : Reinforcement for reinforced concrete work in all sorts of structures including distribution bars, stirrups, binders etc. initial straightening and removal of loose rust ( if necessary), cutting to requisite length, hooking and binding to correct shape placing in proper position an binding with 16 guage black annealed wire in every intersection, complete as per drawing and direction.  Category of steel: JSW/JSPL/SHYAM/SRMB/BMASL/ELECTROSTEEL/SSL				= Rs.60,003.00
Step- 2	Deduct Issue Rate (Per MT) of respective Quality Steel X 1.17	1.17	X	Rs.42,792.00	= -Rs.50,066.64
Step- 3	Add Basic Price at outlet of Steel of respective quality X 1.17	1.17	X	Rs.37,844.00	= Rs.44,277.48
Step- 4	Add cost of Carriage from outlet to site with necessary loading, unloading and stacking charges for 1.05 MT Steel	1.05	X	Rs.178.00	= Rs.186.90
<b>TOTAL COST OF ITEM</b>					<b>= Rs.54,400.74</b>